




# Our Range of Invert Levels




ABS STANDARD

Invert Height 670mm  
Total Drainage Run Determined by slope gradient  
Depth In Ground 2,200mm  
Emergency Storage 3,440Ltr (2.3 days)

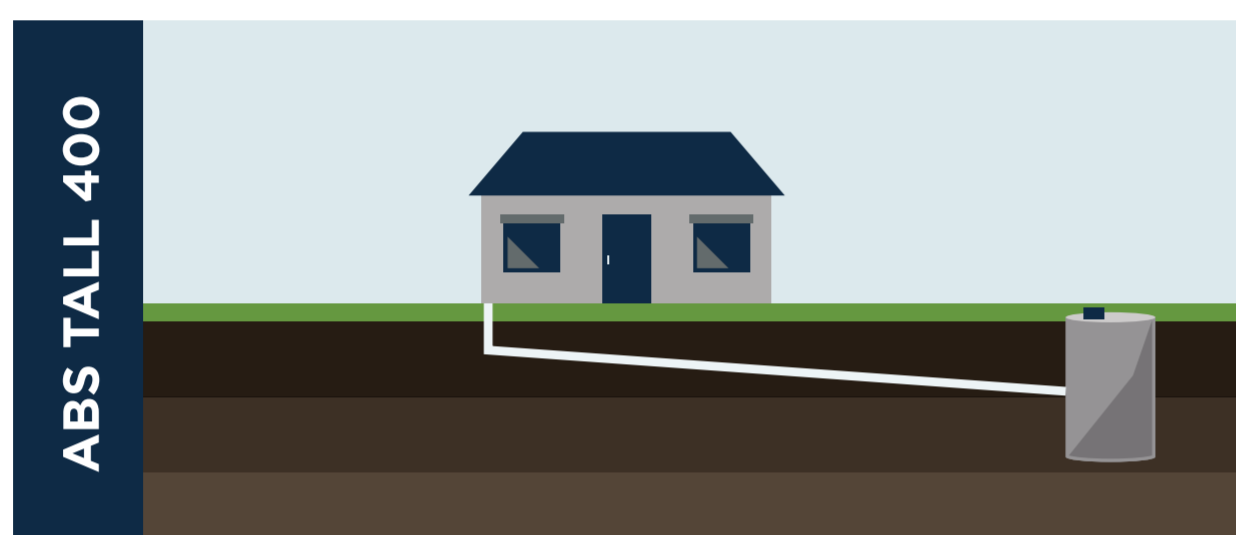


ABS TALL 400

Invert Height 1,070mm  
Total Drainage Run Up to 22m  
Depth In Ground 2,700mm  
Emergency Storage 5,182L (3.5 days)

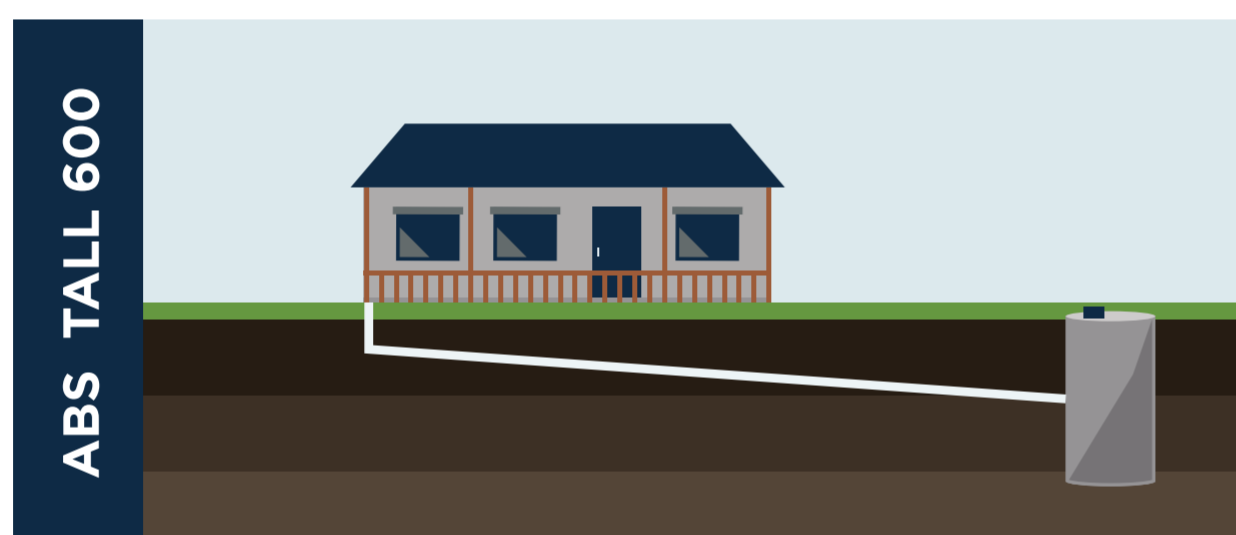


ABS TALL 600

Invert Height 1,270mm  
Total Drainage Run Up to 40m  
Depth In Ground 2,900mm  
Emergency Storage 5,890L (3.9 days)

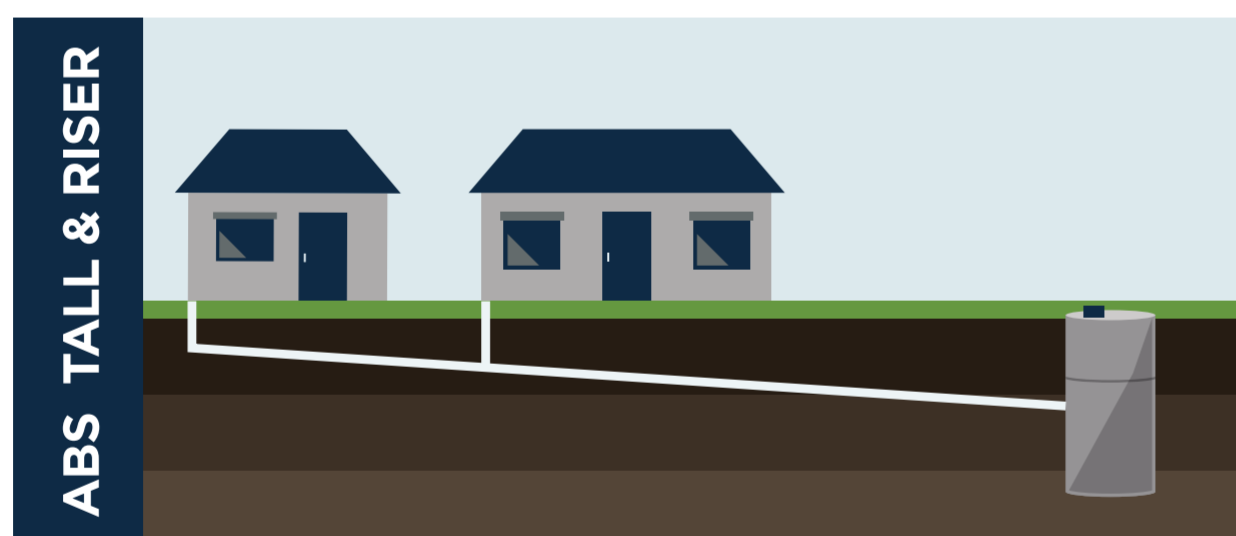

ABS TALL & RISER

- Depth In Ground Invert Height = Base system dimensions + dimensions of the riser/s.
- Total Drainage Run: 35m+
- Risers have no effect on emergency storage.
- Risers available in 500, 600, 700, 800, 900 and 1000mm.

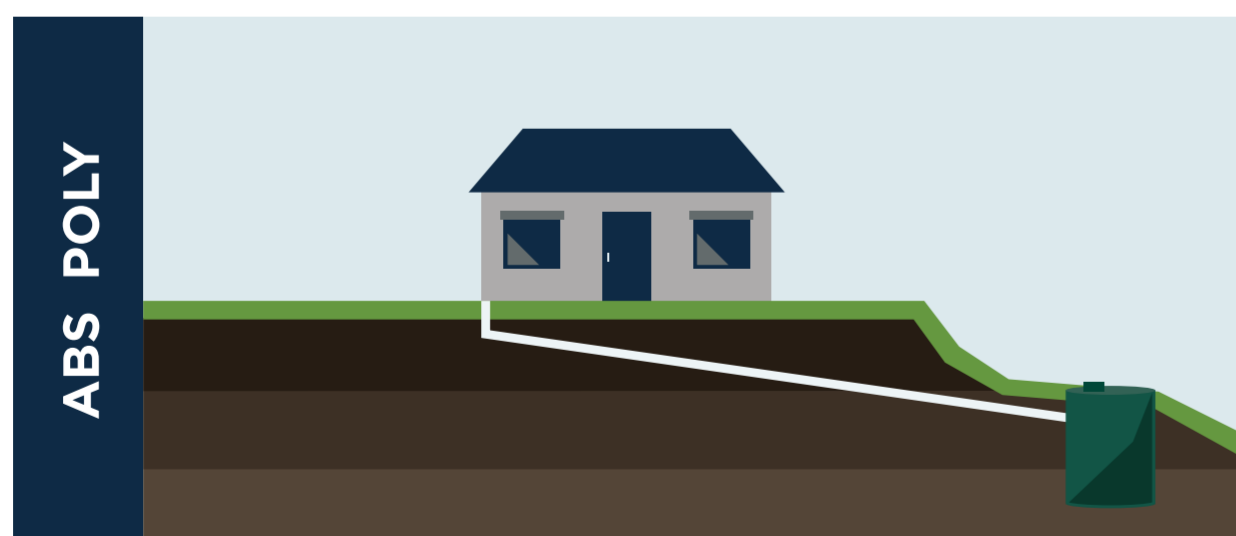

ABS POLY

Invert Height 500mm  
Total Drainage Run Determined by slope gradient  
Depth In Ground 2,200mm  
Emergency Storage 1,042L (1 day)



**Taylex**  
WASTEWATER